



MP9 WATER DETECTOR User guide - EN

Please read this manual carefully before use. We reserve the final interpretation right of this manual.

Packing List

Open the package and make sure that the device is in good condition and all the accessories are included as below.




Water Detector(X1)



Manual(X1)

Appearance & Feature

Appearance

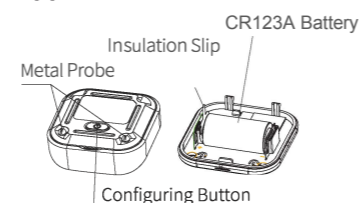

Feature

This product has an innovative double-sided design, a rotary opening design, and an IP66 waterproof rating, which guarantees normal use in humid and dusty environments, and has ultra-low power consumption, low-voltage


indication, and online reporting functions. It is widely used in banks, warehouses and home.

Specification



Wireless Protocol	FSK
Transmit Frequency	868 MHz
Transmitting Power	13dBm (868MHz)
Working Voltage	DC3V(CR123A)
Quiescent Current	<30µA
Comm. Distance	800m(Open Area)
Battery Life	5 year(10 times/day)
IP Class	IP66
Detection Water Level	0.5mm
Working Temperature	0°C - +55°C
Working Humidity	<95%RH
Dimension	58x58x21mm

Add Device

1. Alarm panel must be already added to application iGET M6.
2. In app click "+" > "Add Device" > "Scan Device QR Code" and



and follow the prompts for subsequent operations.
3. Unscrew the two metal probes with a screwdriver and, through the clasp position, open the back cover and remove the battery insulation strips.



4. Press and hold down the device indicator light to put the sub-device into enrolling mode and the green light will flash quickly.
5. Wait for the water detector to be added successfully, the panel will emit a "ding-dong" sound when it is successful. If the sub-device fails to be added, please retry the above steps.

Installation

The product probe is placed upwards in places to be monitored, such as windows, indoor or outdoor floors, or under the elbow of the water pipe. If there is water leakage, the sensor will send an alarm signal to the panel.

Notice

The product needs to have the screws tightened after changing the batteries, if they are not tightened there is a possibility of water leakage, resulting in damage to the product circuit.

Function Instruction

1. This product needs to be used with panel. When using the product for the first time or replacing the panel, it needs to be connected with the panel.
2. This product has a low voltage reminder function. When the product battery voltage is low, the water detector will send a low voltage reminder to the panel.

Warranty + safety notices

- a) Do not place any heavy or sharp objects on the device.
- b) Do not expose the device to direct sunlight and heat, and both must not be covered.
- c) Do not expose the device to an environment with a temperature higher or lower than the recommended temperature.
- d) Do not expose the device to a dusty and humid environment over 85% including rain and liquids (except for outdoor cameras).
- e) Do not use any corrosive cleaning agents to clean the device.
- f) Do not expose the device to strong magnetic or electronic interference.
- g) Do not use any power adapters other than those included with the device. The supplied power supply can only be connected to an electrical outlet whose voltage corresponds to the information on the type plate of the power supply.
- h) Do not leave the power adapter in places with low combustion temperatures and on parts of the human body, as the adapter heats up and may cause injury.

- i) Do not use the device while eating or drinking.
- j) Keep the device out of the reach of children.
- k) The user is not authorized to disassemble the device or replace any of its parts. Opening or removing covers that are not originally accessible poses a risk of electric shock. Incorrect assembly and reconnection of the device also exposes you to the risk of electric shock. In the event of a necessary service intervention, contact only qualified service technicians.
- l) If the device has been in an environment with a temperature lower than -20°C for a certain period of time, leave this device switched off in a room with a temperature of 10°C to +40°C for more than one hour. Now you can power on.
- m) For warranty repairs of the device, apply to your dealer. In case of technical problems and questions, contact your dealer.
- n) For households: The symbol (crossed-out wheeled bin) on the product or in the accompanying documentation means that used electrical or electronic products must not be disposed of with municipal waste. In order to dispose of the product correctly, hand it in at designated collection points, where it will be accepted free of charge.

By disposing of this product correctly, you will help to conserve valuable natural resources and help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste disposal. Please contact your local authorities or the nearest collection point for more details. Incorrect disposal of this type of waste may result in fines in accordance with national regulations. Information for users on disposal of electrical and electronic equipment (business and industrial use): For detailed information on the correct disposal of electrical and electronic equipment, please contact your dealer or supplier. Information for users on disposal of electrical and electronic equipment in other countries outside the European Union: The above symbol (crossed-out wheeled bin) is only valid in European Union countries. For detailed information on the correct disposal of electrical and electronic equipment, please contact your local authorities or the dealer where you purchased the equipment. This is indicated by the crossed-out wheeled bin symbol on the product, packaging or printed materials.

Not intended for use near water, e.g. near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool. Other precautions: Follow the rules for working with electrical appliances and connect the power cord only to the appropriate electrical sockets. The user is not authorized to disassemble the device or replace any of its parts. Opening or removing covers that are not originally intended for this purpose poses a risk of electric shock. Incorrect assembly and reconnection of the device also exposes you to the risk of electric shock.
Declaration of Conformity: Hereby, INTELEK LTD, organizační složka declares that the device type MP9 (LH-302F/K) is in compliance with Directive 2014/53/EU and others. The full EU declaration of conformity is available on the following website: www.iget.eu. The warranty period for the product is 24 months, unless otherwise stated.
RoHS: This device meets the requirements on the restriction of the use of certain hazardous substances in electrical and electronic equipment

(Government Regulation No. 481/2012 Coll., which was amended by Government Regulation No. 391/2016 Coll.) and thus the requirements of Directive 2011/65/EU of the European Parliament and of the Council on the restriction of the use of certain hazardous substances in electrical and electronic equipment. The RoHS declaration can be downloaded from www.iget.eu. **Exclusive manufacturer/importer of iGET products for the EU:** INTELEK LTD, organizační složka, Ericha Roučky 1291/4, 627 00 Brno, Czech Republic, WEB: <http://www.iget.eu> SUPPORT: <http://www.iget.eu/helpdesk> Copyright © 2025 INTELEK LTD. All rights reserved.

